


VS-CVI-D2200SP/3

2Megapixel 1080P Water-proof IR HDCVI Mini Dome Camera**Model**

VS-CVI-D2200SP/3

Features


- 1/3" 2Megapixel CMOS
- 25/30fps@1080P, 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switch
- OSD Menu, control over coaxial cable
- Day/Night(ICR), AWB, AGC, BLC, 3D-DNR,
- 3.6mm fixed lens (2.8 mm, 6mm, 8mm optional)
- Max. IR LEDs length 20m, Smart IR
- IP66, DC12V

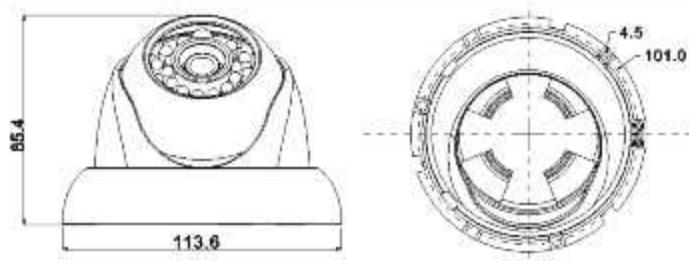Dimensions

sejati4u.com

What Is HD-CVI?**HDCVI vs HD-SDI**

Longer Transmission Distance

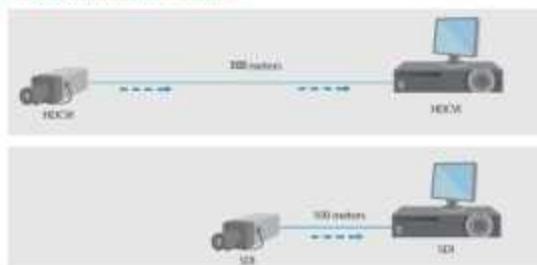

HDCVI can transmit HD signal up to 300 meters via RG59/ RG6 coaxial Cable

Specifications

Model	VS-CVI-D2200SP/3
Camera	
Image Sensor	1/3" 2Mega CMOS
Effective Pixels	1920(H)×1080(V)
Electronic Shutter	1/3s~1/100,000s
Video Frame Rate	1920×1080@25 fps ; 1920×1080@30 fps ; 1280×720@25 fps ; 1280×720@30 fps ; 1280×720@50 fps ; 1280×720@60 fps
Synchronization	Internal
Min. Illumination	0.05Lux@F1.2@0Lux IR LED on)
Video Output	1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch)
Camera Features	
Max. IR LEDs Length	20m, Smart IR
Day/Night	Auto(ICR)/B&W/Color
Noise Reduction	3D/2D
OSD Menu	Support
Lens	
Focal Length	3.6mm (2.8mm, 6mm, 8mm optional)
Mount Type	M12
General	
Power Supply	DC12V±10%
Power Consumption	Max 3.5W
Working Environment	-30°C~+60°C Less than 95%RH (no condensation)
Transmission Distance	Over 300m via 75-3 coaxial cable
Ingress Protection	IP66
Dimensions	Φ113.6mm x 85.8mm
Weight	300g

Better Anti-Interference Capability

HDCVI adopts low-frequency modulation technology, making it free from the high-frequency wireless electric radiation to ensure stable video transmission of high image quality