

VS-CVI-D1100R

1Megapixel 720P IR HDCVI Mini Dome Camera



Model

VS-CVI-D1100R


Features

- 1/2.9" 1Megapixel CMOS
- 25/30fps@720P
- High speed, long distance real-time transmission
- Day/Night(ICR), AWB, AGC, BLC
- 3.6mm fixed lens (6mm optional)
- Max. IR LEDs length 20m, Smart IR
- DC12V

Specifications

Model	VS-CVI-D1100R
Camera	
Image Sensor	1/2.9" 1Megapixel CMOS
Effective Pixels	1260(H) x 720(V)
Electronic Shutter	1/50s-1/100,000s
Video Frame Rate	25fps@720P
Synchronization	Internal
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Video Output	1-channel BNC HDCVI high definition video output
Camera Features	
Max. IR LEDs Length	20m, Smart IR
Day/Night	Auto(ICR) / Color / B/W
Noise Reduction	2D
Lens	
Focal Length	3.6mm (6mm optional)
Mount Type	M12
General	
Power Supply	DC12V±10%
Power Consumption	Max 2W
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)
Transmission Distance	Over 500m via 75-3 coaxial cable
Ingress Protection	IP66
Dimensions(W×D×H)	Ø65mm × 69mm
Weight	200g

Dimensions

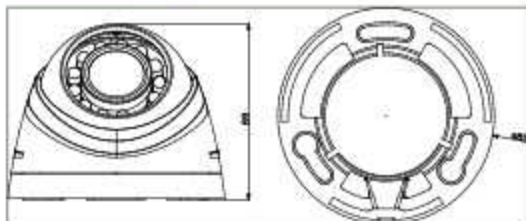

sejati4u.com

What is HD-CVI?

HDCVI vs HD-SDI

Longer Transmission Distance



HDCVI can transmit HD signal up to 300 meters via RG59/ RG6 coaxial Cable

Better Anti-Interference Capability



HDCVI adopts low-frequency modulation technology, making it free from the high-frequency wireless electric radiation to ensure stable video transmission at high image quality