

VS-CVI-BA2200SP/3

2Megapixel 1080P Water-proof IR HDCVI Camera



Specifications

Model	VS-CVI-BA2200SP/3
Camera	
Image Sensor	1/3" 2Megapixel CMOS
Effective Pixels	1920(H)×1080(V)
Electronic Shutter	1/3(s)~1/100,000s
Video Frame Rate	1920×1080@25 fps : 1920×1080@30 fps : 1280×720@25 fps : 1280×720@30 fps : 1280×720@50 fps : 1280×720@60 fps
Synchronization	Internal
Min. Illumination	0.05Lux@F1.2@Lux (IR LED on)
Video Output	1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch)
Camera Features	
Max. IR LEDs Length	50m, Smart IR
Day/Night	Auto(ICR) / Color / B/W
Noise Reduction	2D/3D
OSD Menu	Support
Lens	
Focal length	8mm fixed lens (3.6mm, 6mm, 12mm, 16mm optional)
Mount Type	M12
General	
Power Supply	DC12V±10%
Power Consumption	Max 8W
Working Environment	-30°C~+60°C/ Less than 95%RH (no condensation)
Transmission Distance	Over 300m via 75-3 coaxial cable
Ingress Protection	IP66
Dimensions(W×D×H)	Φ200.2mm×89.1mm×80.4mm
Weight	450g


Model

VS-CVI-B2200SP/3

Features

- 1/3" 2Megapixel CMOS
- 25/30fps@1080P, 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switch
- OSD Menu, control over coaxial cable
- Day/Night(ICR), AWB, AGC, BLC, 3D-DNR
- 8mm fixed lens (3.6 mm, 6mm, 12mm, 16mm optional)
- Max. IR LEDs length 50m, Smart IR
- IP66, DC12V

Dimensions

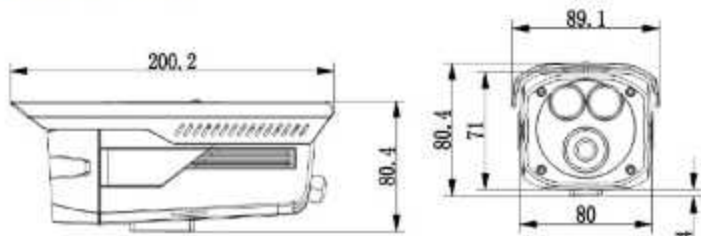


sejati4u.com

What Is HD-CVI?

HDCVI vs HD-SDI

Longer Transmission Distance

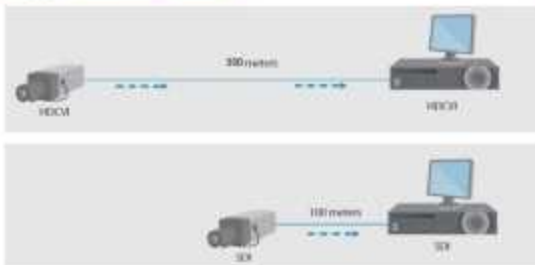

HDCVI can transmit HD signal up to 300 meters via RG59/ RG6 coaxial Cable

Better Anti-Interference Capability



HDCVI adopts low-frequency modulation technology, making it free from the high-frequency wireless electric radiation to ensure stable video transmission of high image quality