



## CNB-G1310N/G1310P

HIGH RESOLUTION COLOR CAMERA



### Features


- 1/3 inch SONY Super HAD CCD
- High Resolution (550 TV Lines)
- Min. Illumination : 0.3 Lux
- AGC, BLC, Flickerless On/Off
- Auto White Balance



### OPTION MODEL

- CNB-G1315N/G1315P : AC24V/DC12V Dual Voltage
- CNB-G2310N/G2310P : Day&Night(ICR) Function

### DIMENSIONS

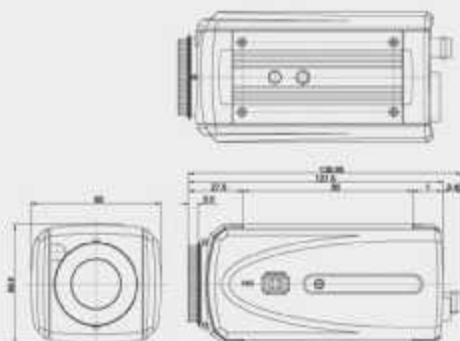

### SPECIFICATIONS

| Model                      | CNB-G1310N                               | CNB-G1310P            |
|----------------------------|--|-----------------------|
| Signal System              | NTSC : 525 Lines                         | PAL : 525 Lines       |
| Scanning System            | 2:1 Interlace                            |                       |
| Scanning Frequency (H)     | 15.734 KHz                               | 15.625 KHz            |
| Scanning Frequency (V)     | 59.94 Hz                                 | 50 Hz                 |
| Sync. System               | Internal                                 |                       |
| Image Sensor               | 1/3 inch SONY Super HAD CCD              |                       |
| Total/Effective Pixels No. | 410K/380K                                | 470K/440K             |
| Lens Mount                 | C/CS Mount                               |                       |
| Iris Mode                  | Video / BLC / DC (Slide Switch)          |                       |
| S/N Ratio                  | More than 48dB (AGC On)                  |                       |
| Resolution                 | Horizontal : 550 TV Lines                |                       |
| Video Output Level         | 1.0 Vp-p (75 Ohms, Composite)            |                       |
| Min Illumination           | 0.3 Lux / F=1.4 (AGC On)                 |                       |
| Shutter Speed              | 1/60 - 1/100,000 Sec.                    | 1/50 - 1/100,000 Sec. |
| White Balance              | Auto                                     |                       |
| AGC                        | On / Off                                 |                       |
| BLC                        | On / Off                                 |                       |
| Flickerless                | On / Off                                 |                       |
| Supplied Voltage           | DC 9V - 15V (Recommendation DC12 ± 0.5V) |                       |
| Power Consumption          | Max. 2.4W / 300mA                        |                       |
| Dimensions (WxHxD)         | 65.0 x 68.5 x 127.5 mm                   |                       |
| Weight                     | Approx. 315g                             |                       |