

VS-CVI-D2100SP/3

1.3Megapixel 720P Water-proof IR HDCVI Mini Dome Camera





Model

VS-CVI-D2100SP/3

Features

- 1/3" 1.3Megapixel CMOS
- 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switch.
- OSD Menu, control over coaxial cable
- Day/Night(ICR), AWB, AGC, BLC, 3D-DNR,
- 6mm fixed lens (2.8mm, 3.6mm, 8mm optional)
- Max. IR LEDs length 20m, Smart IR
- IP66, DC12V

Dimensions



sejati4u.com


Specifications

| Model | VS-CVI-D2100SP/3 |
|------------------------|------------------------------------------------------------------------------------------------------|
| Camera | |
| Image Sensor | 1/3" 1.3Mega CMOS |
| Effective Pixels | 1280(H)×960(V) |
| Electronic Shutter | 4/25s-1/45,000s |
| Video Frame Rate | 1280×720@25 fps ; 1280×720@30 fps ; 1280×720@30 fps ; 1280×720@60 fps |
| Synchronization | Internal |
| Min. Illumination | 0.01Lux@F1.2(0Lux IR LED on) |
| Video Output | 1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch) |
| Camera Features | |
| Max. IR LEDs Length | 20m, Smart IR |
| Day/Night | Auto(ICR)/B&W/Color |
| Noise Reduction | 3D/2D |
| OSD Menu | Support |
| Lens | |
| Focal Length | 3.6mm (2.8mm, 6mm 8mm optional) |
| Mount Type | M12 |
| General | |
| Power Supply | DC12V±10% |
| Power Consumption | Max 3.5W |
| Working Environment | -30°C--+60°C/ Less than 95%RH (no condensation) |
| Transmission Distance | Over 500m via 75-3 coaxial cable |
| Ingress Protection | IP66 |
| Dimensions | Φ113.6mm x 85.4mm |
| Weight | 300g |

What Is HD-CVI?

HDCVI vs HD-SDI

Longer Transmission Distance

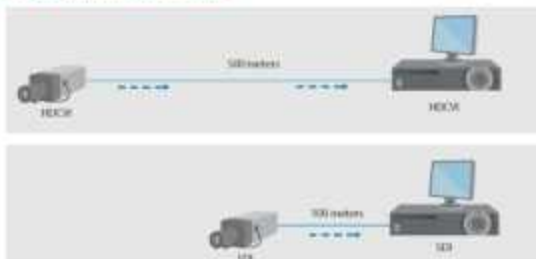

HDCVI can transmit HD signal up to 300 meters via RG59/ RG6 coaxial Cable

Better Anti-Interference Capability



HDCVI adopts low-frequency modulation technology, making it free from the high-frequency wireless electric radiation to ensure stable video transmission at high image quality